

65 Inch outdoor advertising LCD displays


KEY FEATURES	PICTURE
Industrial-grade A+ LCD IPS panel 1920x1080 FHD, MAX to 3840x2160 (4K) Brightness ≥ 2500 nits 7*24 Hours working uninterrupted Energy-Efficient LED Backlighting, Sun-readable, Auto-light adjustment, Wide Temperature Tolerance, Weatherproof and durable construction, Vandal-Resistant Tempered Glass. Optional: 1. Player alone / Network / Touchscreen 2. IP Rating: IP55 / IP67 3. OS: Windows / Android / Linux / None 4. Color Options: Grey, White, Black...	

Specification Table:

Digital Signage Size		65"
Model Number		ST- HBD-W65SA
PANELS	Panel Type	A+ LCD IPS Panel 65 inch
	Active Area	1428.5×803.5 mm (W*H)
	Aspect Ratio	16:9
	Backlight	Patented LED module + Constant power components
	Resolution	1920x1080; Max to 3840x2160 UHD
	Display Colors	16.7M/1.07B 87% (CIE1931)
	Brightness	2500+ nits Sunlight-readable, Max to 5000 nits
	Contrast Ratio	1200:1
	Visual Angle	178°(H) / 178°(V)
	Response Time	≤ 5ms
	S-System	PAL / NTSC / SECAM
	Life Expectancy	60000 Hours
FUNCTIONS	Operation System	Windows, Android, Linux
	Network	Ethernet, Wi-Fi, 4G/5G, etc
	Network Protocol	TCP IP/PPPOE/ICMP/DHCP/DNS/FTP/HTTPS
	Audio Format	MP3,WMA,AMR,OGG,AAC,WAV,FLAC,APE
	Video Format	MP4,3GP,MPG,AVI,WMV,FLV,SWF,RMVB,MKV,VOB
	Image Format	JPG,BMP,PNG,TIF,ICO,GIF,TGA
	Log Management	Support terminal log and playlist log
	Supportive	Player Alone, Network, Touch Screen

HARDWARE	Materials	Cold-rolled metal plate + special Outdoor Powder
	Color Options	Silver, Grey, White, Black or customized
	Heat Control	Industrial Air-cooling system
	Tempered Glass	6-8 mm (AG, AR or Laminated only in requirement)
	IP Rating	Air-cooling≤IP55 Optical Bonding≥IP67
	Speakers	2*10W Stereo
	I/O Connectivity	DP, HDMI, RJ-45, USB, Wi-Fi, 4G/5G
	Dimensions	1680x1100x200 MM, Customizable
	N.W / G.W	96 KG / 122 KG (for Reference)
	Certificates	ISO9001/CCC/CE /FCC/RoHS/IP65
	Accessories	Remote Control, Power Cord, Wires, Key, Rack, Instruction, Approval Certificate, Warranty Card
ENVIRONMENT	Operation Temp	-35°C to 55°C
	Storage Temp	-40°C to 60°C
	Working Humidity	5% to 95%
	Storage Humidity	5% to 95%
POWER	Voltage	AC 100V - 240V, 50/60Hz
	Watts	≈550W Due to heat-control system
	Standby	≤3W
	Power Mode	Manual Automatic Timer-setting On or Off

ILLUMINATION DIMENSTIONS:

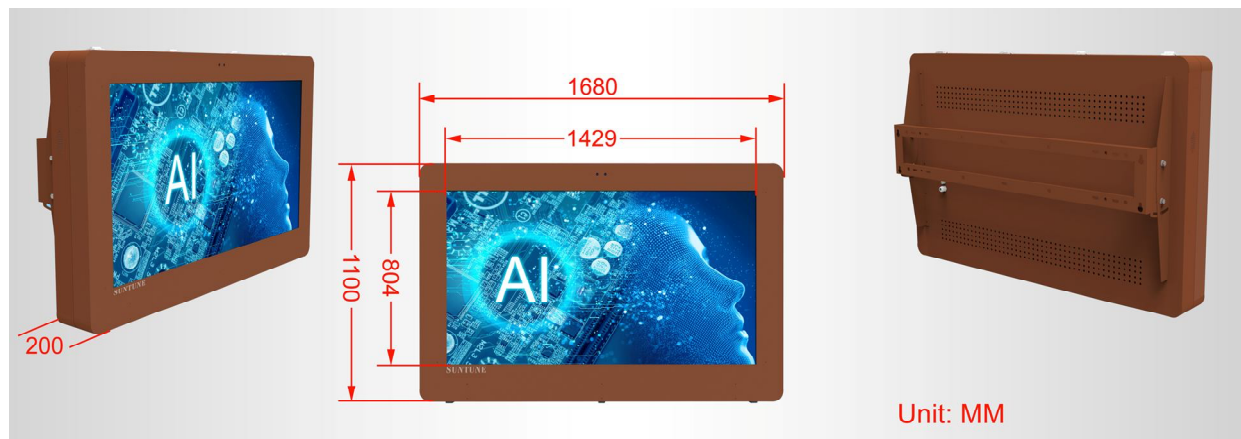

(Dimensions might be adaptable by different enclosures and heat-control systems)

DECLARE:

Pictures and Parameters here are for reference alone. All referred to physical products.
Final explanations belong to SUNTUNE SignageHub.