

43 Inch Outdoor Interactive Touch Panel (Interactive Touchscreen Table)**KEY FEATURES**

Industrial-grade A+ LCD IPS Panel
 FHD 1920x1080
 Brightness ≥ **2000 nits**
 7*24 Hours working uninterrupted

Weatherproof & Durable,
 Interactive Features,
 High Brightness Display,
 Energy-efficient, All-in-one Design,
 Versatile Use.

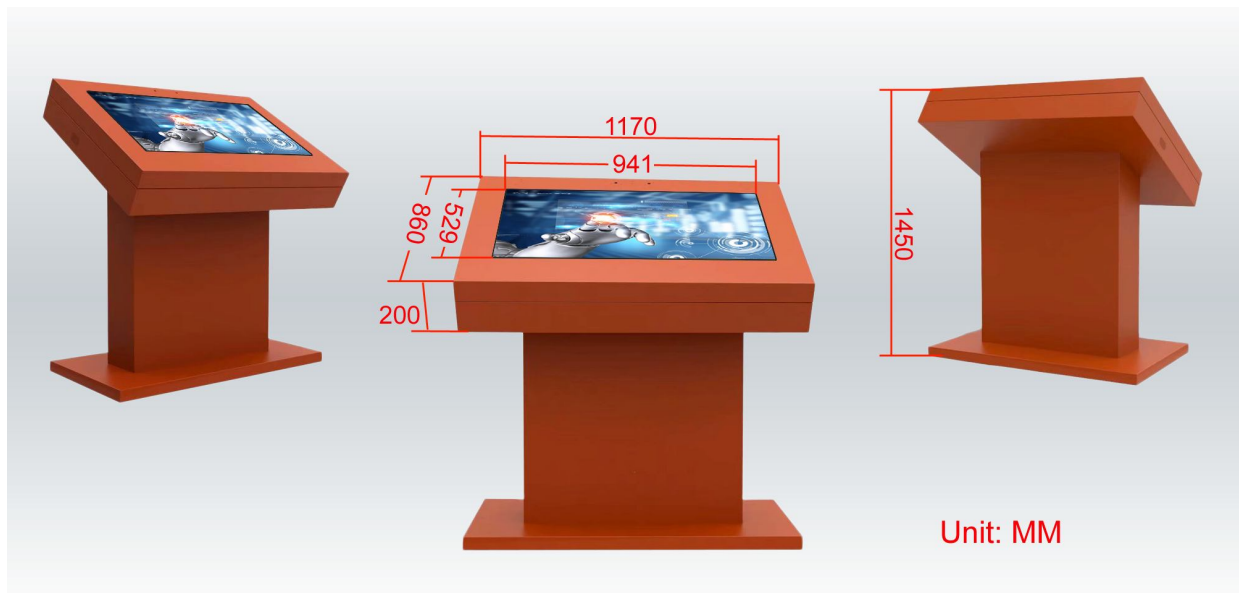
Optional:

1. Player alone / Network / Touchscreen
2. IP Rating: IP55 / IP65
3. OS: Windows / Android / Linux / None
4. Color Options: Grey, White, Black...

PICTURE**Specification Table:**

Digital Signage Size		43"
Model Number		ST- ITS-T43CA
PANELS	Panel Type	A+ LCD IPS Panel 43 inch
	Active Area	941.2x529.3 mm (W*H)
	Aspect Ratio	16:9
	Backlight	Patented LED module + Constant power components
	Resolution	1920x1080 (FHD)
	Display Colors	16.7M
	Brightness	2000+ nits Sunlight-readable
	Contrast Ratio	1200:1
	Visual Angle	178°(H) / 178°(V)
	Response Time	≤5ms
	S-System	PAL / NTSC / SECAM
	Life Expectancy	60000 Hours
FUNCTIONS	OS	Windows, Android, Linux
	Network	Ethernet, Wi-Fi, 4G/5G, etc
	Network Protocol	TCP IP/PPPOE/ICMP/DHCP/DNS/FTP/HTTPS
	Audio Format	MP3,WMA,AMR,OGG,AAC,WAV,FLAC,APE
	Video Format	MP4,3GP,MPG,AVI,WMV,FLV,SWF,RMVB,MKV,VOB
	Image Format	JPG,BMP,PNG,TIF,ICO,GIF,TGA
	Log Management	Support terminal log and playlist log
Supportive		Player Alone, Network, Touch Screen

HARDWARE	Materials	Cold-rolled metal plate + special Outdoor Powder
	Color Options	Silver, Grey, White, Black or customized
	Heat Control	Industrial Air-cooling system Air-conditioner system
	Tempered Glass	6-8 mm (AG, AR or Laminated only in requirement)
	IP Rating	Air-cooling≤IP55 Air-conditioner≥IP65
	Speakers	2*10W Stereo
	I/O Connectivity	HDMI, RJ-45, USB, SD Card
	Dimensions	1450x1170x860 MM, Customizable
	N.W / G.W	60 KG / 85 KG (for Reference)
	Certificates	ISO9001/CCC/CE /FCC/RoHS/IP65
	Accessories	Remote Control, Power Cord, Wires, Key, Rack, Instruction, Approval Certificate, Warranty Card
ENVIRONMENT	Operation Temp	-35°C to 55°C
	Storage Temp	-40°C to 60°C
	Working Humidity	10% to 90%
	Storage Humidity	10% to 90%
POWER	Voltage	AC 100V - 240V, 50/60Hz
	Watts	400W – 800W Due to heat-control systems
	Standby	≤ 3W
	Power Mode	Manual Automatic Timer-setting On or Off

DIMENSION REFERENCE:

(Dimensions might be adaptable by different enclosures and heat-control systems)

REMARK

Pictures & Parameters here are for reference only. All referred to physical Products.
Final explanations belong to SUNTUNE SignageHub.

Website: www.suntunesignage.com Hotline: (+86) 188-2025-4103 Email : info@suntunesignage.com

Address : Bldg F10, Gangshen Center, Xinniu Rd, Minzhi Str, Longhua Dist., Shenzhen 518131, Guangdong, China.

43 Inch Outdoor Interactive Touch Panel (Interactive Touchscreen Table)