


55 Inch Commercial Outdoor Digital Signage Provider (Wall-mounted)**KEY FEATURES**

Industrial-grade A+ LCD panel
 FHD 1920x1080 up to 3840x2160 4K
 High brightness (**2000+** nits)
 7*24 Hour working uninterrupted

Outdoor-rated and weatherproof construction
 Vibrant, full-color display with sharp image quality
 Energy-efficient LED backlighting
 Built-in cooling system to ensure optimal performance
 Secure, durable housing for protection

Optional:


1. Plug and Play | Network | Touch
2. Air-cooling≤IP55 | Air-conditioning≥IP65
3. Android | Windows | Linux
4. Black, Grey, White,...Customizable

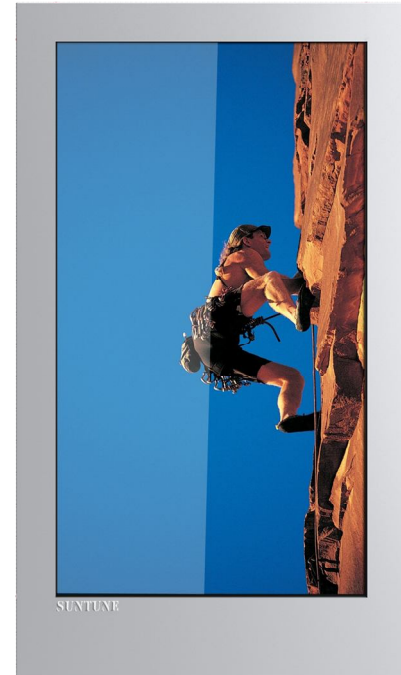PICTURE**Specification Table:**

Digital Signage Size		55"
Model Number		ST- WPD-W55PA
PANELS	Panel Type	A+ LCD Panel 55 inch (IPS)
	Active Area	1209.6×680.4 mm (W*H)
	Aspect Ratio	16:9
	Backlight	Patented LED module + Constant power components
	Resolution	UHD 3840x2160 compatible with 1920x1080
	Display Colors	16.7M / 1.07B
	Brightness	2000+ nits Sunlight-readable
	Contrast Ratio	1200:1
	Visual Angle	178°(H) / 178°(V)
	Response Time	≤ 5ms
	S-System	PAL / NTSC / SECAM
	Life Expectancy	60000 Hours
FUNCTIONS	OS	Windows, Android, Linux
	Network	Ethernet, Wi-Fi, 4G/5G, etc
	Network Protocol	TCP IP/PPPOE/ICMP/DHCP/DNS/FTP/HTTPS
	Audio Format	MP3,WMA,AMR,OGG,AAC,WAV,FLAC,APE
	Video Format	MP4,3GP,MPG,AVI,WMV,FLV,SWF,RMVB,MKV,VOB
	Image Format	JPG,BMP,PNG,TIF,ICO,GIF,TGA
	Log Management	Support terminal log and playlist log
Supportive		Player Alone, Network, Touch Screen

HARDWARE	Materials	Cold-rolled metal plate + special Outdoor Powder
	Color Options	Silver, Grey, White, Black or customized
	Heat Control	Industrial Air-cooling system; Air-conditioning system
	Tempered Glass	6-8 mm (Optional with AG, AR or Laminated glass)
	IP Rating	Air-cooling≤IP55 Air-conditioning≥IP65
	Speakers	2*10W Stereo
	I/O Connectivity	DP, HDMI, RJ-45, USB, SD Card...
	Dimensions	1500x800x200 MM, Customizable
	N.W / G.W	130 KG / 155 KG (for Reference)
	Certificates	ISO9001/CCC/CE /FCC/RoHS/IP65
	Accessories	Remote Control, Power Cord, Wires, Key, Rack, Instruction, Approval Certificate, Warranty Card
ENVIRONMENT	Operation Temp	-35°C to 55°C
	Storage Temp	-40°C to 60°C
	Working Humidity	10% to 90%
	Storage Humidity	10% to 90%
POWER	Voltage	AC 100V - 240V, 50/60Hz
	Consumption	700W-1.3kW Due to heat-control system
	Standby	≤ 3W
	Power Mode	Manual Automatic Timer-setting On or Off

ILLUMINATION DRAWING

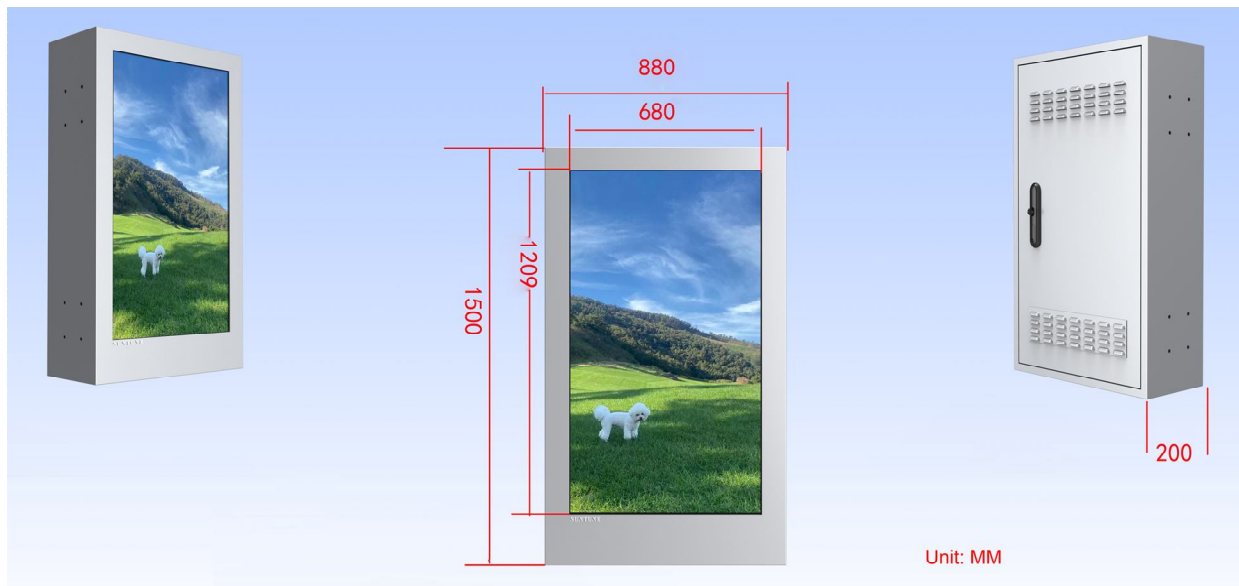

(Dimensions might be adaptable by different enclosures and heat-control systems)

DECLARE:

Pictures & Parameters here are for reference only. All standardized to physical Products.
SUNTUNE SignageHub saves the rights for final explanations.