

75 Inch Sunlight-readable Billboard Displays

KEY FEATURES

Industrial-grade A+ LCD IPS panel
 UHD 3840x2160 (4K)
 Brightness ≥ **3000** nits
 7*24 Hours outdoor operation unattended

Energy-saving WLED backlight,
 Sun-readable, Auto-light sensor,
 Weatherproof, Vandal-proof, Dustproof,
 Smart diagnostics system,
 Vandal-resistant tempered glass.

Optional:

1. Plug and Play | Network | Touch Screen
2. Air-cooling≤IP55 | Air-conditioning≥IP65
3. Windows, Android, Linux
4. Gray, White, Black, Blue...Customizable

PICTURE




Specification Table:

Digital Signage Size		75"
Model Number		ST-DDB-L75PM
PANELS	Panel Type	A+ LCD IPS Panel 75 inch
	Active Area	1649.7x927.9 mm (W*H)
	Aspect Ratio	16:9
	Backlight	Patented LED module + Constant power components
	Resolution	UHD 3840x2160 (4K) compatible with 1920x1080
	Display Colors	1.07B 67% NTSC
	Brightness	3000+ Nits sunlight-readable
	Contrast Ratio	1200:1
	Visual Angle	178°(H) / 178°(V)
	Response Time	≤ 5ms
	S-System	PAL / NTSC / SECAM
	Life Expectancy	60000 Hours
FUNCTIONS	Operation System	Windows, Android, Linux
	Network	Ethernet, Wi-Fi, 4G/5G, etc
	Network Protocol	TCP IP/PPPOE/ICMP/DHCP/DNS/FTP/HTTPS
	Audio Format	MP3,WMA,AMR,OGG,AAC,WAV,FLAC,APE
	Video Format	MP4,3GP,MPG,AVI,WMV,FLV,SWF,RMVB,MKV,VOB
	Image Format	JPG,BMP,PNG,TIF,ICO,GIF,TGA
	Supportive	Player Alone, Network, Touch Screen
	Log Management	Support terminal log and playlist log

HARDWARE	Materials	Cold-rolled metal plate + special Outdoor Powder
	Color Options	Silver, Grey, White, Black or customized
	Heat Control	Industrial Air-cooling system Air-conditioner system
	Tempered Glass	6-8 mm (optional in RG, AG, AR or Laminated)
	IP Rating	Air-cooling≤IP55 Air-conditioner≥IP65
	Speakers	2*10W Stereo
	I/O Connectivity	DP, HDMI, RJ-45, USB, Customizable
	Dimensions	2100*1850*300 MM, Customizable
	N.W / G.W	260KG / 298KG (For reference)
	Certificates	ISO9001/CCC/CE /FCC/RoHS/IP65
	Accessories	the Remote Control, AC Power Cord, Key, Rack, Instruction, Approval Certificate, Warranty Card
ENVIRONMENT	Operation Temp	-35°C to 55°C
	Storage Temp	-40°C to 60°C
	Working Humidity	5% to 95%
	Storage Humidity	5% to 95%
POWER	Voltage	AC 100V - 240V, 50/60Hz
	Consumption	1.4kW – 2.5kW (Due to heat-control systems)
	Standby	≤ 3W
	Power Mode	Manual Automatic Timer-setting On or Off

ILLUMINATION DRAWING

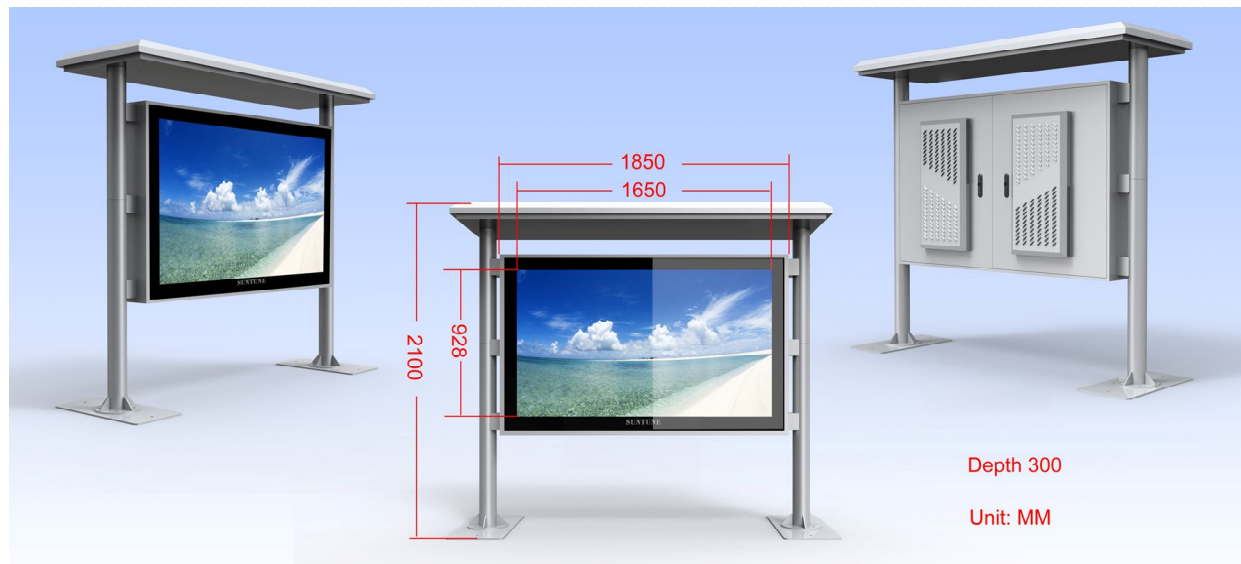

(Dimensions might be adaptable by different enclosures and heat-control systems)

DECLARE:

All pictures here are for reference. Precision be standardized to physical products.
The final explanation belongs to SUNTUNE SignageHub.

Website: www.suntunesignage.com Hotline: (+86) 188-2025-4103 Email : info@suntunesignage.com

Address : Bldg F10, Gangshen Center, Xinniu Rd, Minzhi Str, Longhua Dist., Shenzhen 518131, Guangdong, China.

75 Inch Sunlight-readable Billboard Displays (for Reference)

