

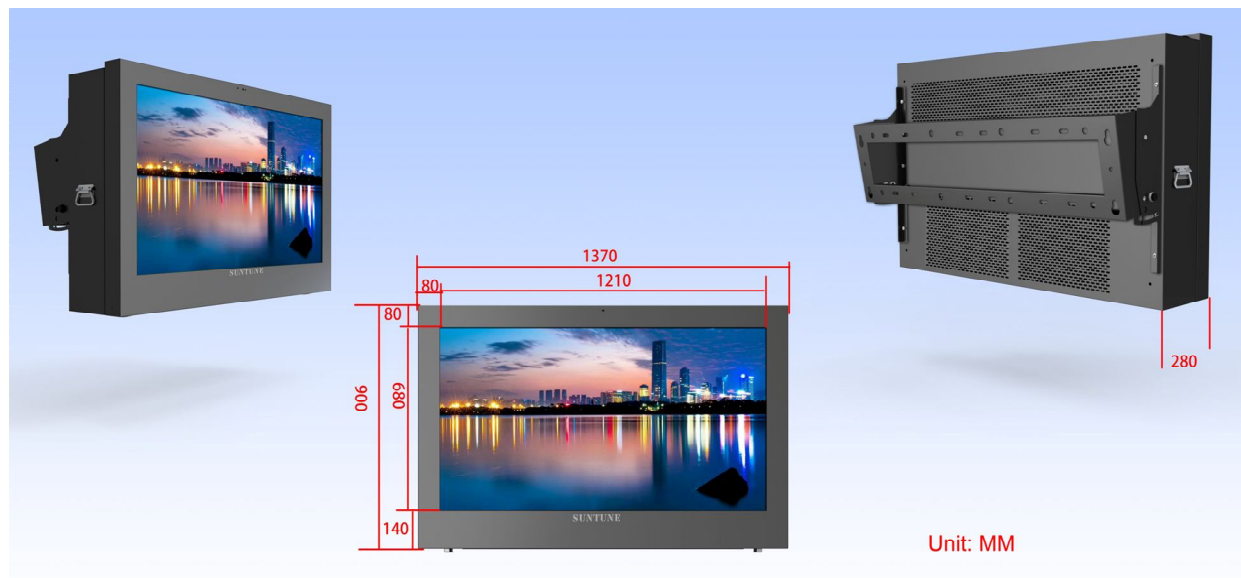
## 55 Inch Weather-resistant Outdoor Enclosures

| KEY FEATURES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | PICTURE                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| <p>Industrial-grade A+ LCD panel<br/>FHD 1920x1080 up to 3840x2160 4K<br/>High brightness (<b>2500+</b> nits)<br/>7*24 Hour working uninterrupted</p> <p>Robust Weather Protection,<br/>Durability for corrosion, UV rays,<br/>Efficient Ventilation,<br/>Versatile installation options,<br/>Maximized Display Visibility.</p> <p><b>Optional:</b></p> <ol style="list-style-type: none"> <li>1. Plug and Play   Network   Touch</li> <li>2. Air-cooling≤IP55   Air-conditioning≥IP65</li> <li>3. Android   Windows   Linux</li> <li>4. Black, Grey, White,...Customizable</li> </ol> |  |

### Specification Table:

|                      |                  |                                                 |
|----------------------|------------------|-------------------------------------------------|
| Digital Signage Size |                  | 55"                                             |
| Model Number         |                  | ST- WPD-W55MA                                   |
| PANELS               | Panel Type       | A+ LCD Panel 55 inch (IPS)                      |
|                      | Active Area      | 1209.6×680.4 mm (W*H)                           |
|                      | Aspect Ratio     | 16:9                                            |
|                      | Backlight        | Patented LED module + Constant power components |
|                      | Resolution       | UHD 3840x2160 compatible with 1920x1080         |
|                      | Display Colors   | 16.7M / 1.07B                                   |
|                      | Brightness       | <b>2500+</b> nits Sunlight-readable             |
|                      | Contrast Ratio   | 1200:1                                          |
|                      | Visual Angle     | 178°(H) / 178°(V)                               |
|                      | Response Time    | ≤ 5ms                                           |
|                      | S-System         | PAL / NTSC / SECAM                              |
|                      | Life Expectancy  | 60000 Hours                                     |
| FUNCTIONS            | OS               | Windows, Android, Linux                         |
|                      | Network          | Ethernet, Wi-Fi, 4G/5G, etc                     |
|                      | Network Protocol | TCP IP/PPPOE/ICMP/DHCP/DNS/FTP/HTTPS            |
|                      | Audio Format     | MP3,WMA,AMR,OGG,AAC,WAV,FLAC,APE                |
|                      | Video Format     | MP4,3GP,MPG,AVI,WMV,FLV,SWF,RMVB,MKV,VOB        |
|                      | Image Format     | JPG,BMP,PNG,TIF,ICO,GIF,TGA                     |
|                      | Log Management   | Support terminal log and playlist log           |
|                      | Supportive       | Player Alone, Network, Touch Screen             |

|                    |                  |                                                                                                |
|--------------------|------------------|------------------------------------------------------------------------------------------------|
| <b>HARDWARE</b>    | Materials        | Cold-rolled metal plate + special <b>Outdoor Powder</b>                                        |
|                    | Color Options    | Silver, Grey, White, Black or customized                                                       |
|                    | Heat Control     | Industrial Air-cooling system; Air-conditioning system                                         |
|                    | Tempered Glass   | 6-8 mm (Optional with AG, AR or Laminated glass)                                               |
|                    | IP Rating        | Air-cooling≤IP55   Air-conditioning≥IP65                                                       |
|                    | Speakers         | 2*10W Stereo                                                                                   |
|                    | I/O Connectivity | DP, HDMI, RJ-45, USB, SD Card...                                                               |
|                    | Dimensions       | 1370x900x280 MM, Customizable                                                                  |
|                    | N.W / G.W        | 130 KG / 155 KG (for Reference)                                                                |
|                    | Certificates     | ISO9001/CCC/CE /FCC/RoHS/IP65                                                                  |
|                    | Accessories      | Remote Control, Power Cord, Wires, Key, Rack, Instruction, Approval Certificate, Warranty Card |
| <b>ENVIRONMENT</b> | Operation Temp   | -35°C to 55°C                                                                                  |
|                    | Storage Temp     | -40°C to 60°C                                                                                  |
|                    | Working Humidity | 10% to 90%                                                                                     |
|                    | Storage Humidity | 10% to 90%                                                                                     |
| <b>POWER</b>       | Voltage          | AC 100V - 240V, 50/60Hz                                                                        |
|                    | Consumption      | 700W-1.3kW Due to heat-control system                                                          |
|                    | Standby          | ≤ 3W                                                                                           |
|                    | Power Mode       | Manual   Automatic Timer-setting On or Off                                                     |

**ILLUMINATION DRAWING**

(Dimensions might be adaptable by different enclosures and heat-control systems)

**DECLARE:**

Pictures & Parameters here are for reference only. All standardized to physical Products.  
SUNTUNE SignageHub saves the rights for final explanations.

**55 Inch Weather-resistant Outdoor Enclosures (for Reference)**