

55 Inch Interactive Signage for Outdoor Spaces (Wall-mounted)


KEY FEATURES	PICTURE
Industrial-grade A+ LCD panel FHD 1920x1080 up to 3840x2160 4K High brightness (2000+ nits) 7*24 Hour working uninterrupted Self-service touch functionality, Weatherproof design (IP rating), Energy-efficient technology, Intuitive user interface, Interactive digital kiosk features Optional: 1. Plug and Play Network Touch 2. Air-cooling≤IP55 3. Android Windows Linux 4. Black, Grey, White,...Customizable	

Specification Table:

Digital Signage Size		55"
Model Number		ST- RWD-W55SJ
PANELS	Panel Type	A+ LCD Panel 55 inch (IPS)
	Active Area	1209.6×680.4 mm (W*H)
	Aspect Ratio	16:9
	Backlight	Patented LED module + Constant power components
	Resolution	UHD 3840x2160 compatible with 1920x1080
	Display Colors	16.7M / 1.07B
	Brightness	2000+ nits Sunlight-readable
	Contrast Ratio	1200:1
	Visual Angle	178°(H) / 178°(V)
	Response Time	≤ 5ms
	S-System	PAL / NTSC / SECAM
	Life Expectancy	60000 Hours
FUNCTIONS	OS	Windows, Android, Linux
	Network	Ethernet, Wi-Fi, 4G/5G, etc
	Network Protocol	TCP IP/PPPOE/ICMP/DHCP/DNS/FTP/HTTPS
	Audio Format	MP3,WMA,AMR,OGG,AAC,WAV,FLAC,APE
	Video Format	MP4,3GP,MPG,AVI,WMV,FLV,SWF,RMVB,MKV,VOB
	Image Format	JPG,BMP,PNG,TIF,ICO,GIF,TGA
	Integrations	Printer, Camera, Scanner, Emergency Button, etc.
Supportive		Player Alone, Network, Touch Screen

HARDWARE	Materials	Cold-rolled metal plate + special Outdoor Powder
	Color Options	Silver, Grey, White, Black or customized
	Heat Control	Industrial Air-cooling system
	Tempered Glass	6-8 mm (Optional with AG, AR or Laminated glass)
	IP Rating	Air-cooling≤IP55
	Speakers	2*10W Stereo
	I/O Connectivity	DP, HDMI, RJ-45, USB, SD Card...
	Dimensions	2300x1100x300 MM, Customizable
	N.W / G.W	120 KG / 148 KG (for Reference)
	Certificates	ISO9001/CCC/CE /FCC/RoHS/IP65
	Accessories	Remote Control, Power Cord, Wires, Key, Rack, Instruction, Approval Certificate, Warranty Card
ENVIRONMENT	Operation Temp	-35°C to 55°C
	Storage Temp	-40°C to 60°C
	Working Humidity	5% to 95%
	Storage Humidity	5% to 95%
POWER	Voltage	AC 100V - 240V, 50/60Hz
	Consumption	400W-700W Due to heat-control system
	Standby	≤ 3W
	Power Mode	Manual Automatic Timer-setting On or Off

ILLUMINATION DRAWING

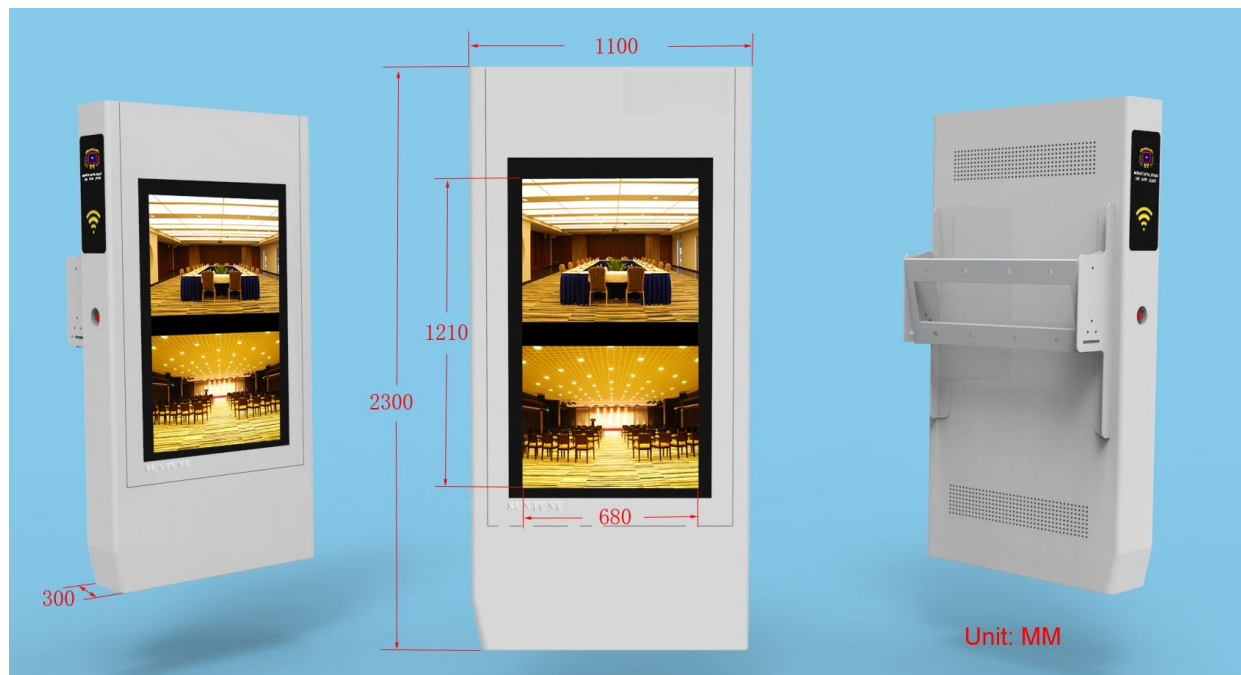

(Dimensions might be adaptable by different enclosures and heat-control systems)

DECLARE: Pictures & Parameters here are for reference only. All standardized to physical Products. SUNTUNE SignageHub saves the rights for final explanations.

Website: www.suntunesignage.com Hotline: (+86) 188-2025-4103 Email : info@suntunesignage.com

Address : Bldg F10, Gangshen Center, Xinniu Rd, Minzhi Str, Longhua Dist., Shenzhen 518131, Guangdong, China.