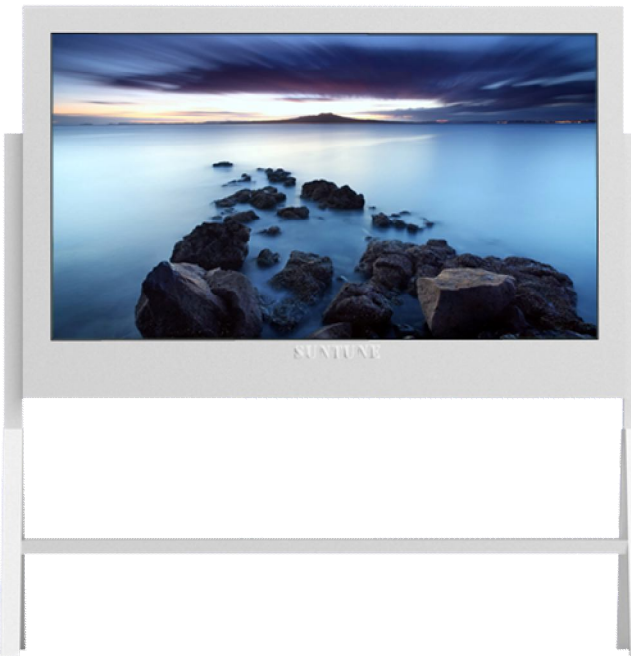


86 Inch Full-sunlight Readable Mobile Signage + Universal Wheels


KEY FEATURE	PICTURE
A+ LCD IPS Panel 3840 x 2160 (UHD) 24/7 operation capability Ultra-high brightness panel (2000+ Nits) Weather-Resistant Outdoor Enclosure, Tempered Glass Protection, Plug-and-Play Setup with easy access, Mobile Rack Design with universal wheels. Optional: 1. Built-in media player Network 2. IP55 with Fan-cooling System 3. IP65 with Air-conditioner System 4. OS: Android Windows Linux 5. Black, Grey, White,...Customizable	

Specification Table:

Digital Signage Size		86"
Model Number		ST-MD-H86MA
PANELS	Panel Type	A+ LCD Panel 86 inch (IPS)
	Active Area	1895.04x1065.96 mm (W*H)
	Aspect Ratio	16:9
	Backlight	Patented LED module + Constant power components
	Resolution	UHD 3840x2160 compatible to 1920x1080
	Display Colors	16.7M/1.07B
	Brightness	2000+ nits Sunlight-readable
	Contrast Ratio	1200:1
	Visual Angle	178°(H) / 178°(V)
	Response Time	≤ 5ms
	S-System	PAL / NTSC / SECAM
	Life Expectance	60000 Hours
FUNCTIONS	OS	Windows, Android, Linux
	Network	Ethernet, Wi-Fi, 4G/5G, etc
	Network Protocol	TCP IP/PPPOE/ICMP/DHCP/DNS/FTP/HTTPS
	Audio Format	MP3,WMA,AMR,OGG,AAC,WAV,FLAC,APE
	Video Format	MP4,3GP,MPG,AVI,WMV,FLV,SWF,RMVB,MKV,VOB
	Image Format	JPG,BMP,PNG,TIF,ICO,GIF,TGA
	Log Management	Support terminal log and playlist log
Supportive		Player Alone, Network, Touch Screen

HARDWARE	Materials	Cold-rolled metal plate + special Outdoor Powder
	Color Options	Silver, Grey, White, Black or customized
	Heat Control	Industrial Air-cooling system Air-conditioner system
	Tempered Glass	6-8 mm (Optional with AG, AR or Laminated)
	IP Rating	Air-cooling≤IP55 Air-conditioner≥IP65
	Speakers	2*10W Stereo
	I/O Connectivity	DP, HDMI, RJ-45, USB, SD Card
	Dimensions	2200x2100x180 MM, Customizable
	N.W / G.W	280 KG / 350 KG (for Reference)
	Certificates	ISO9001/CCC/CE /FCC/RoHS/IP65
	Accessories	Remote Control, Power Cord, Wires, Key, Rack, Instruction, Approval Certificate, Warranty Card
ENVIRONMENT	Operation Temp	-35°C to 55°C
	Storage Temp	-40°C to 60°C
	Working Humidity	5% to 95%
	Storage Humidity	5% to 95%
POWER	Voltage	AC 100V - 240V, 50/60Hz
	Consumption	1.4kW-3kW Due to heat-control system
	Standby	≤ 3W
	Power Mode	Manual Automatic Timer-setting On or Off

ILLUMINATION DRAWING

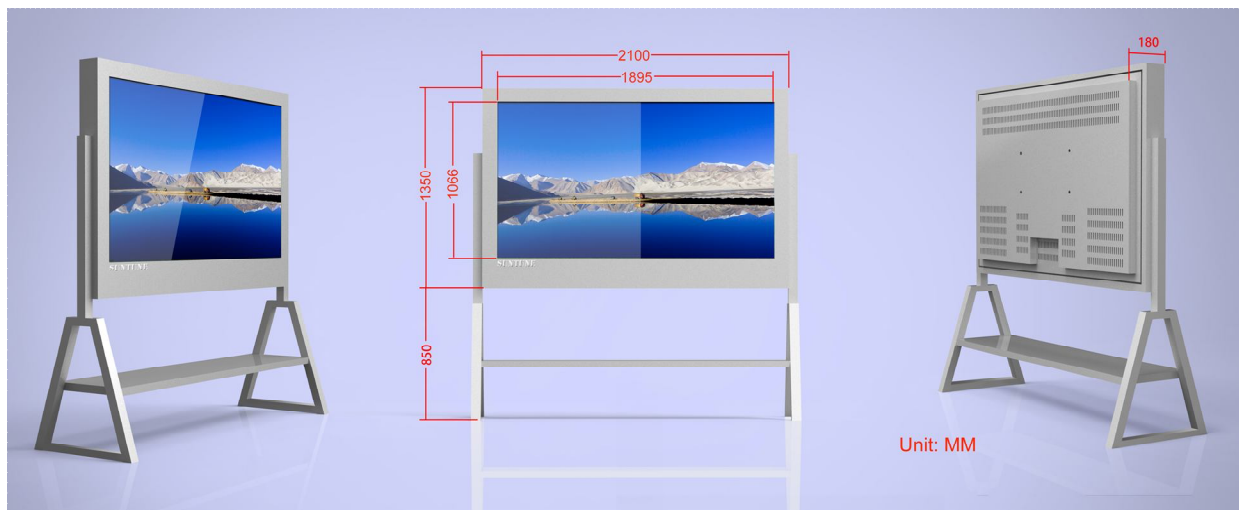

(Dimensions might be adaptable by different enclosures and heat-control systems)

DECLARE:

Pictures & Parameters here are for reference only. All referred to physical Products.
Final explanations belong to SUNTUNE SignageHub.